

SIZING CATHETER








For Consistent Accuracy, Choose Accu-Vu

Accu-Vu* Sizing Catheters' radiopaque markers show consistent placement across the entire sizing pattern (within +/- 1mm accuracy).

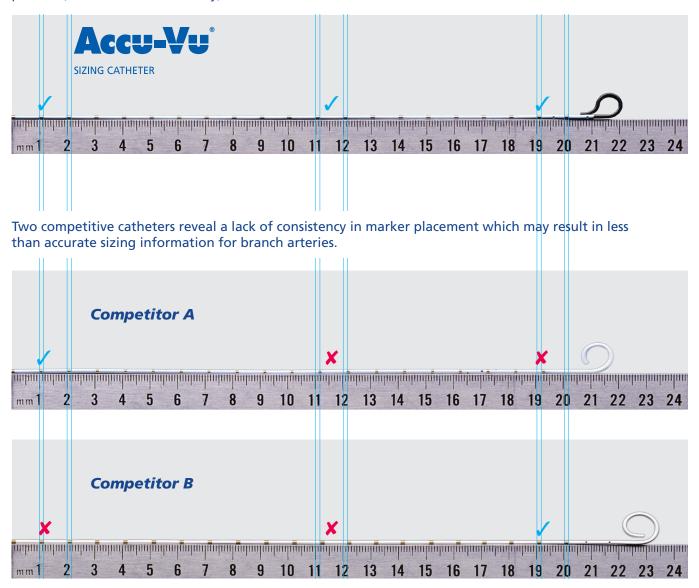



Strategic Marker Placement

Accu-Vu's first marker is strategically placed to enable the catheter tip to be positioned directly above the level of the renal arteries, with the marker at the top of the renal artery. This limits any filling of the superior mesenteric artery with contrast when mapping the aorta—reducing the overall volume of contrast used per procedure.

Safe and Fast

Accu-Vu Sizing Catheters have an enhanced, soft radiopaque tip.

A softer, less traumatic tip with a finely-tuned degree of rigidity provides safe and fast navigation to the intended anatomical site.

Meet Clinical Needs with Wide Range of Selection

Accu-Vu is offered in a broad selection of both 4F and 5F sizes.

With a wide range of selection, you are assured the right match for virtually every anatomical and procedural measurement need. Accu-Vu Omni* Flush sizing catheter provides a more directed bolus of contrast, allowing for less reflux into adjacent branch vessels and less overall contrast load.

2 cm Segment Sizing Catheter



2 platinum bands are spaced 2 cm apart.

Band distance is measured from inside band edge to inside band edge.

Description	4F UPN	5F UPN	SH	GW	Shaft	Flow Rate [†] 4F/5F (mL/sec)
Omni Flush	H787137090055	H787137090015	6	.035"	70 cm	20/26
Omni Flush	_	H787137090025	6	.038"	70 cm	-/26
Omni Flush	H787137090065	H787137090035	6	.035"	100 cm	16/22
Omni Flush	_	H787137090045	6	.038"	100 cm	-/22
Pigtail Flush	H787137091055	H787137091015	10	.035"	70 cm	20/26
Pigtail Flush	_	H787137091025	10	.038"	70 cm	-/26
Pigtail Flush	H787137091065	H787137091035	10	.035"	100 cm	16/22
Pigtail Flush	_	H787137091045	10	.038"	100 cm	-/22
Straight Flush	H787137092035	H787137092015	6	.035"	70 cm	20/26
Straight Flush	H787137092045	H787137092025	6	.035"	100 cm	16/22

[†]Flow rate in mL/sec at 1050 psi. 50%/50% solution of 37°C glycerin and water (simulated contrast)

25 cm Segment Sizing Catheter




6 platinum bands are spaced 1 cm apart. Four platinum bands are spaced at 5 cm increments.

Band distance is measured from inside band edge to inside band edge.

Description	4F UPN	5F UPN	SH	GW	Shaft	Flow Rate [†] 4F/5F (mL/sec)
Omni Flush	H787137094055	H787137094015	6	.035"	70 cm	20/26
Omni Flush	-	H787137094025	6	.038"	70 cm	-/26
‡Omni Flush	-	H787137094035	6	.035"	100 cm	-/22
‡Omni Flush	_	H787137094045	6	.038"	100 cm	-/22
‡Pigtail Flush	-	H787137095015	10	.035"	70 cm	-/26
Pigtail Flush	_	H787137095025	10	.038"	70 cm	-/26
Pigtail Flush	H787137095065	H787137095035	10	.035"	100 cm	16/22
Pigtail Flush	_	H787137095045	10	.038"	100 cm	-/22
‡Straight Flush	-	H787137096015	6	.035"	70 cm	-/26
Straight Flush	H787137096045	H787137096025	6	.035"	100 cm	16/22

^{*}Flow rate in mL/sec at 1050 psi. 50%/50% solution of 37°C glycerin and water (simulated contrast) *Please allow 4-6 weeks for delivery of built to order products

20 cm Segment Sizing Catheter



21 platinum bands are spaced 1 cm apart.

Band distance is measured from inside band edge to outside band edge.

Description	4F UPN	5F UPN	SH	GW	Shaft	Flow Rate [†] 4F/5F (mL/sec)
Omni Flush	H787137097045	H787137097015	6	.035"	70 cm	20/26
Omni Flush	_	H787137097025	6	.038"	70 cm	-/26
Omni Flush	H787137097055	H787137097035	6	.035"	100 cm	16/22
Pigtail Flush	H787137098045	H787137098015	10	.035"	70 cm	26/26
Pigtail Flush	-	H787137098025	10	.038"	70 cm	-/26
Pigtail Flush	H787137098055	H787137098035	10	.035"	100 cm	16/22
Straight Flush	H787137099025	H787137099015	6	.035"	70 cm	20/26
Straight Flush	-	H787137099205	6	.035"	100 cm	-/22

 $^{^{\}dagger}$ Flow rate in mL/sec at 1050 psi. 50%/50% solution of 37°C glycerin and water (simulated contrast)

= New Product; Available for U.S. Only.

28 mm Sizing Catheter



2 platinum bands are spaced 28 mm apart.

Band distance is measured from inside band edge to inside band edge.

Description	4F UPN	5F UPN	SH	GW	Shaft	Flow Rate [†] 4F/5F (mL/sec)
Pigtail Flush	H787137093035	H787137093015	10	.035"	70 cm	20/26
Pigtail Flush	H787137093045	H787137093025	10	.035"	90 cm	18/24

[†]Flow rate in mL/sec at 1050 psi. 50%/50% solution of 37°C glycerin and water (simulated contrast)

of sideholes







Low volume configurations are built to order and may require greater lead time.

 $Consult\ your\ Angio Dynamics\ representative\ for\ country-specific\ product\ availability.$

For a complete list of Warnings, Precautions, and Potential Complications refer to the Instructions for Use package insert provided with the product.

IMPORTANT RISK INFORMATION

INDICATION FOR USE: AngioDynamics Angiographic Catheters are designed for use where angiographic diagnosis is indicated.

CONTRAINDICATIONS: Angiographic Catheters should not be used for any purpose other than those indicated in the instructions.

 ${\it CAUTION: Federal (USA) law restricts these devices to sale by or on the order of a physician.}\\$

angiodynamics

USA > 14 Plaza Drive, Latham, NY 12110 > tel: 800-772-6446 or 518-798-1215 > fax: 518-798-1360 International > Haaksbergweg 75 (Margriettoren), 1101 BR, Amsterdam Z-O > The Netherlands tel: +31 (0)20 753 2949 > fax: +31 (0)20 753 2939

www.angiodynamics.com