



Teleport[®]

Microcatheter

2.0 Fr - 2.1 Fr
MICROCATHETER

Ultimate Control and Trackability for Guidewire Access
IN THE MOST COMPLEX LESIONS

CSI[®]

CARDIOVASCULAR
SYSTEMS, INC.



DESIGNED FOR ULTIMATE TORQUABILITY, TRACKABILITY AND SAFETY

Maximize guidewire support and luminal access in the most complex cases.

ULTRA LOW PROFILE AND PUSHABILITY
for Navigation Inside Lesions and Micro Channels

Two available versions for extra penetration (Teleport®) and extra torquability (Teleport® Control) to accommodate various anatomies via antegrade and retrograde approach

HYBRACOIL CONSTRUCTION
for Guidewire Support and Crossing

Hybrid braiding and coil layer provide an optimal balance of trackability, catheter control, kink resistance and flexibility from hub to tip

DURA TAPERED TIP
for Robustness and Visibility

DURa Radiopaque is built with exceptional durability and for clear positioning during catheter cannulation inside tight and calcified lesions








- Inner Layer: PTFE Liner
- Middle Layer: Hybrid Braiding and Coil
- Outer Layer: Ultra-thin Polymer Jacket

HYbrid BRAiding and COIL Construction

Hydrophilic coating applied to distal 60 cm section (including tip)

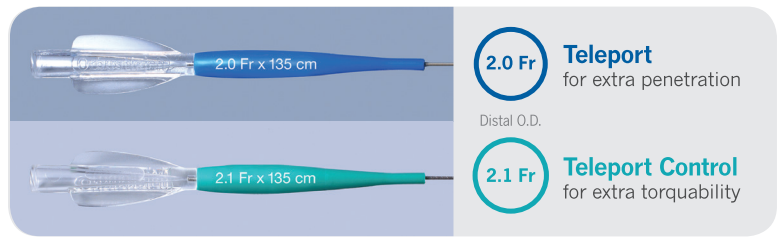

Tip Durability Test

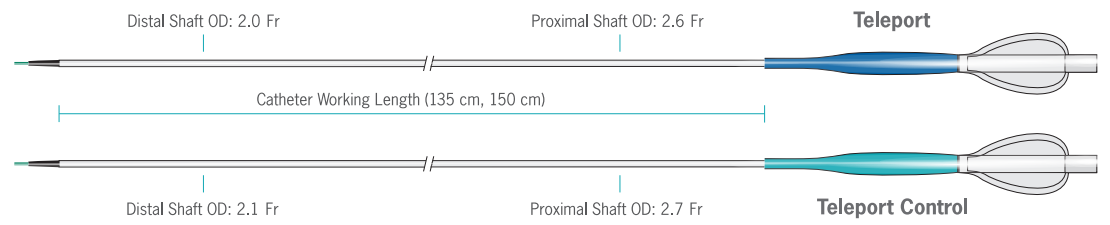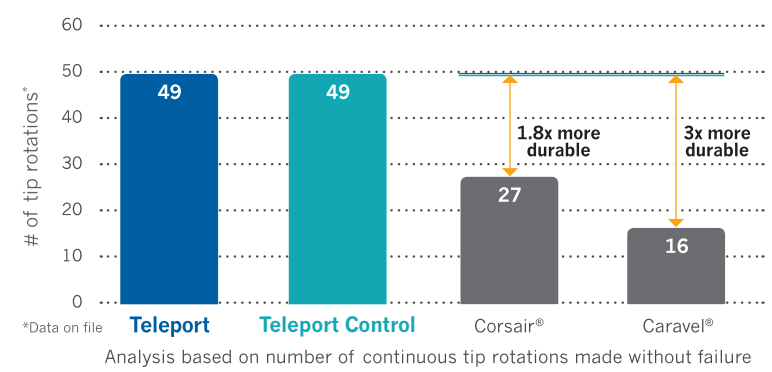

Teleport[®]

Microcatheter

ORDERING INFORMATION

TELEPORT	PROFILE	LENGTH
220-13-1000U	2.0 Fr	135 cm
220-15-1000U		150 cm
TELEPORT CONTROL	PROFILE	LENGTH
221-13-1000U	2.1 Fr	135 cm
221-15-1000U		150 cm

For more information, please contact your local CSI representative or call customer service at 1-877-274-0901.

Distributed by:



1225 Old Hwy 8 NW
St. Paul, MN 55112

T: 651.259.1600
877.274.0901

F: 612.677.3355
www.csi360.com

Manufactured by:



1 Jinkui Road,
Fuitian Free Trade Zone,
Shenzhen, 518038, China

T: +86.755.8358.0181
F: +86.755.8358.0169
www.OrbusNeich.com

TECHNICAL SPECIFICATIONS

DIMENSIONS	TELEPORT	TELEPORT CONTROL
CATHETER TYPE	OVER THE WIRE	
GUIDING CATHETER COMPATIBILITY	5 Fr	
MAXIMUM GUIDEWIRE O.D.	0.014"	
PROXIMAL CATHETER PROFILE	2.6 Fr	2.7 Fr
DISTAL CATHETER PROFILE	2.0 Fr	2.1 Fr
TIP ENTRY PROFILE	0.0190"	
INNER LUMEN DIAMETER (body)	0.0170"	0.0175"
INNER LUMEN DIAMETER (tip)	0.0157"	
CATHETER EXTERIOR COATING	HYDROPHILIC (60 cm of distal catheter including tip)	
CATHETER WORKING LENGTH	135 cm (antegrade); 150 cm (retrograde)	

Teleport and OrbusNeich are registered trademarks of OrbusNeich Medical, Ltd. ©2018 OrbusNeich. Corsair and Caravel are registered trademarks of Asahi Intecc. CSI is a registered trademark of Cardiovascular Systems, Inc. ©2018 Cardiovascular Systems, Inc. All rights reserved. G-70-0947-Rev01 CSI EN-5261 12/18