

FRONTLINE GUIDEWIRES

**Savion FLX™ Guidewires**

| UPN Order Code  | Diameter (in) | Length (cm) | Tip Load (grams) | Tip shape |
|-----------------|---------------|-------------|------------------|-----------|
| H7493942318510  | 0.014         | 185         | 2.9              | Straight  |
| H749394231851J0 | 0.014         | 185         | 2.9              | Angled    |
| H7493942230010  | 0.014         | 300         | 2.9              | Straight  |
| H749394223001J0 | 0.014         | 300         | 2.9              | Angled    |

**V-14™ Controlwire™ Guidewires**

| UPN Order Code  | Diameter (in) | Length (cm) | Taper (cm) | Tip Load (grams) | Tip shape |
|-----------------|---------------|-------------|------------|------------------|-----------|
| H74939216718210 | 0.014         | 182         | 8          | 6                | Straight  |
| H74939216718220 | 0.014         | 182         | 8          | 6                | Angled    |
| H74939216730010 | 0.014         | 300         | 8          | 6                | Straight  |
| H74939216730020 | 0.014         | 300         | 8          | 6                | Angled    |
| H74939216918210 | 0.014         | 182         | 11         | 3                | Straight  |
| H74939216918220 | 0.014         | 182         | 11         | 3                | Angled    |
| H74939216930010 | 0.014         | 300         | 11         | 3                | Straight  |
| H74939216930020 | 0.014         | 300         | 11         | 3                | Angled    |

**V-18™ Controlwire™ Guidewires**

| UPN Order Code | Diameter (in) | Length (cm) | Taper (cm) | Tip Load (grams) | Tip shape |
|----------------|---------------|-------------|------------|------------------|-----------|
| M001468480     | 0.018         | 110         | 8          | 8                | Straight  |
| M001468500     | 0.018         | 150         | 8          | 8                | Straight  |
| M001468520     | 0.018         | 200         | 8          | 8                | Straight  |
| M001468540     | 0.018         | 300         | 8          | 8                | Straight  |
| M001468560     | 0.018         | 150         | 12         | 6                | Straight  |
| M001468580     | 0.018         | 200         | 12         | 6                | Straight  |
| M001468600     | 0.018         | 300         | 12         | 6                | Straight  |

CROSSING GUIDEWIRES

**Victory™ 14 Guidewires**

| UPN Order Code  | Diameter (in) | Length (cm) | Tip Load (grams) | Tip shape |
|-----------------|---------------|-------------|------------------|-----------|
| H74939230195120 | 0.014         | 195         | 12               | Straight  |
| H74939230300120 | 0.014         | 300         | 12               | Straight  |
| H74939230195180 | 0.014         | 195         | 18               | Straight  |
| H74939230300180 | 0.014         | 300         | 18               | Straight  |
| H74939231195250 | 0.014         | 195         | 25               | Straight  |
| H74939231300250 | 0.014         | 300         | 25               | Straight  |
| H74939231195300 | 0.014         | 195         | 30               | Straight  |
| H74939231300300 | 0.014         | 300         | 30               | Straight  |


**Victory™ 18 Guidewires**

| UPN Order Code  | Diameter (in) | Length (cm) | Tip Load (grams) | Tip shape |
|-----------------|---------------|-------------|------------------|-----------|
| H74939232195120 | 0.018         | 195         | 12               | Straight  |
| H74939232300120 | 0.018         | 300         | 12               | Straight  |
| H74939232195180 | 0.018         | 195         | 18               | Straight  |
| H74939232300180 | 0.018         | 300         | 18               | Straight  |
| H74939232195250 | 0.018         | 195         | 25               | Straight  |
| H74939232300250 | 0.018         | 300         | 25               | Straight  |
| H74939232195300 | 0.018         | 195         | 30               | Straight  |
| H74939233300300 | 0.018         | 300         | 30               | Straight  |

DELIVERY SUPPORT GUIDEWIRES

**Savion DLVR™ Guidewires**

| UPN Order Code  | Diameter (in) | Length (cm) | Tip Load (grams) | Tip shape |
|-----------------|---------------|-------------|------------------|-----------|
| H7493942118210  | 0.014         | 182         | 0.8              | Straight  |
| H749394211821J0 | 0.014         | 182         | 0.8              | Angled    |
| H7493942030010  | 0.014         | 300         | 0.8              | Straight  |
| H749394203001J0 | 0.014         | 300         | 0.8              | Angled    |

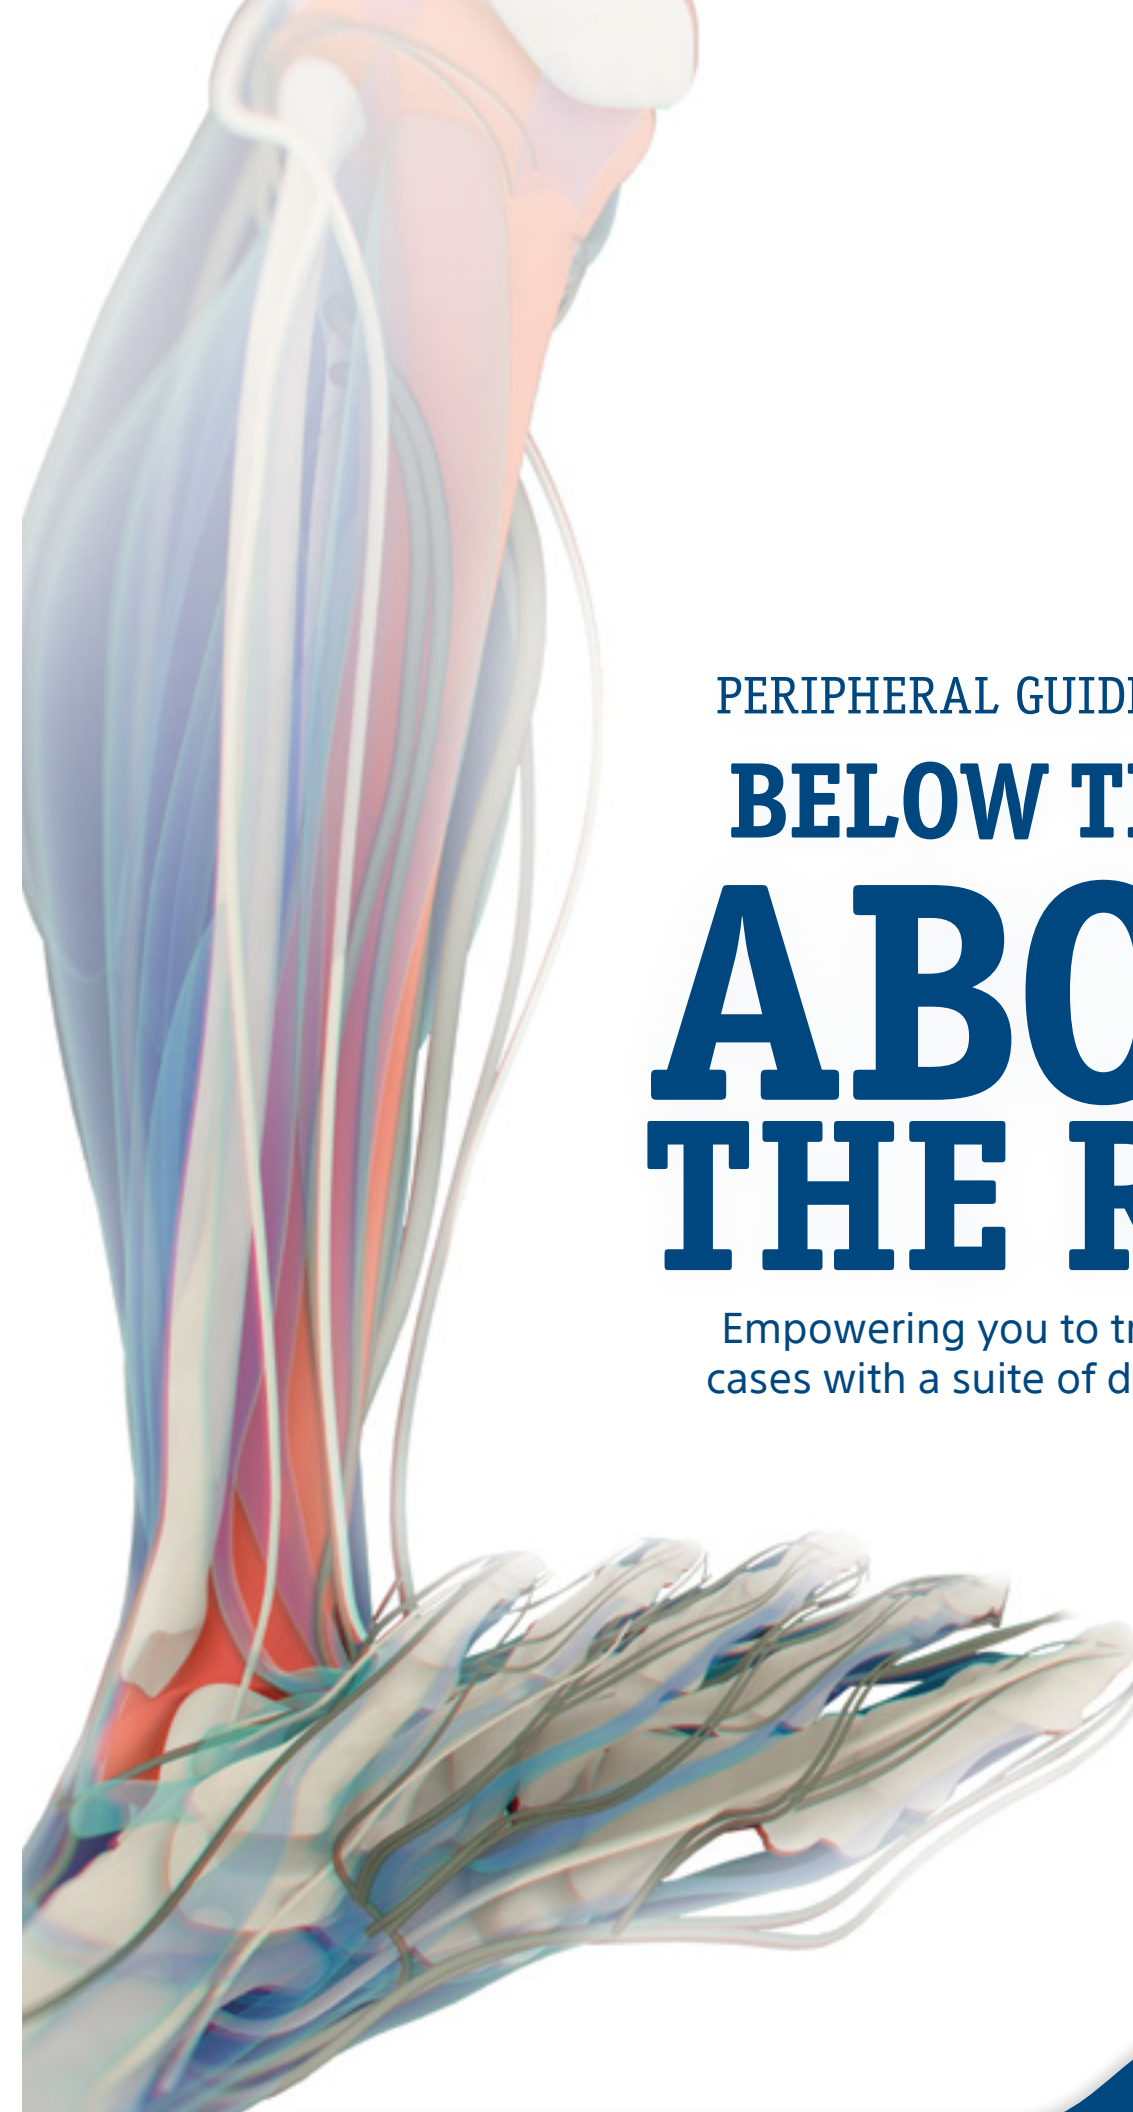

PERIPHERAL GUIDEWIRE PORTFOLIO  
**BELOW THE KNEE**  
**ABOVE**  
**THE REST**


Empowering you to treat challenging BTK cases with a suite of dedicated guidewires

# Technology you trust. Results you can rely on.

Long, heavily calcified lesions. Tortuous anatomy. High-risk patients. Together, these challenges make below-the-knee (BTK) interventions some of the most difficult, time-consuming cases you face.

Building on the trusted, market-leading technology of V-18, our suite of dedicated guidewires exhibit attributes ideally matched for BTK interventions, ensuring you have exactly what you need for your wire escalation strategy. Whether your top priority is access, crossing, or delivering therapy to complex lesions, these guidewires help you achieve the best possible outcomes, especially for your CLI patients.

## BTK GUIDEWIRE SELECTION GUIDANCE

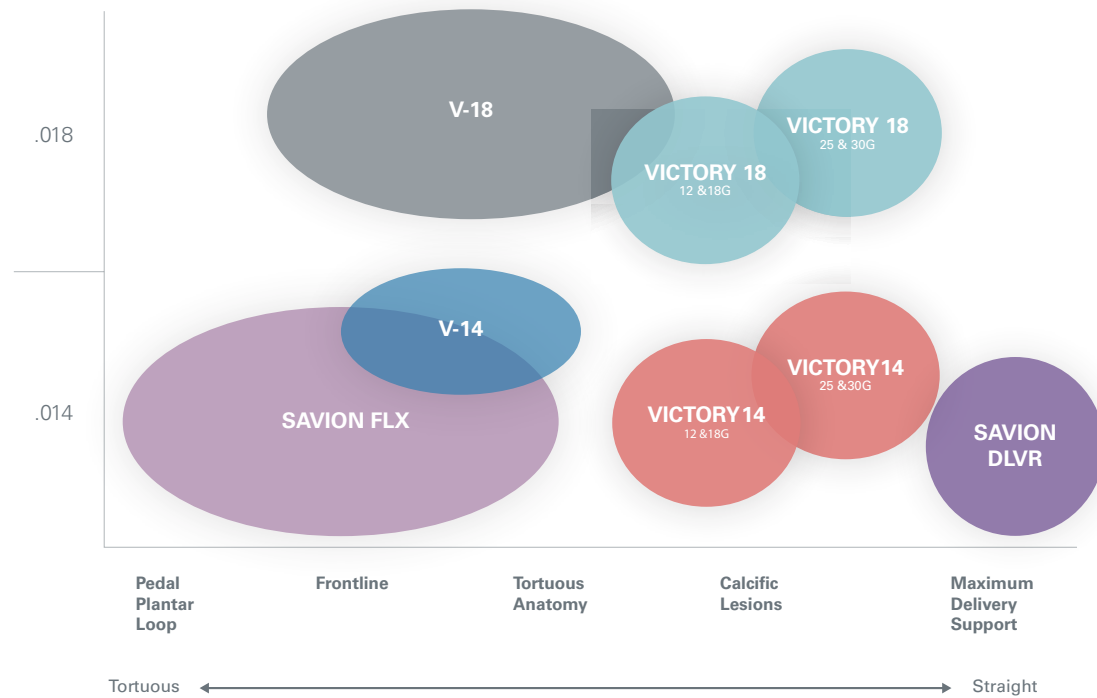

### FRONTLINE GUIDEWIRES

#### Savion FLX™ Guidewire

Navigate and cross in infrapopliteal arteries

|                     |                           |                           |                             |                            |
|---------------------|---------------------------|---------------------------|-----------------------------|----------------------------|
| Tip Load (g)<br>2.9 | Tip Radiopacity (cm)<br>2 | Tip Diameter (in)<br>0.14 | Tip Style<br>Polymer Sleeve | Tip Coating<br>Hydrophilic |
|---------------------|---------------------------|---------------------------|-----------------------------|----------------------------|

#### V-14™ ControlWire® Guidewire

Navigate and cross in infrapopliteal arteries

|   |                           |                           |                             |                            |
|---|---------------------------|---------------------------|-----------------------------|----------------------------|
| Tip Load (g)<br>3 (long taper)<br>6 (short taper) | Tip Radiopacity (cm)<br>4 | Tip Diameter (in)<br>0.14 | Tip Style<br>Polymer Sleeve | Tip Coating<br>Hydrophilic |
|---|---------------------------|---------------------------|-----------------------------|----------------------------|

#### V-18™ ControlWire® Guidewire

Navigate and cross in SFA, infrapopliteal arteries

|   |                           |                           |                             |                            |
|---|---------------------------|---------------------------|-----------------------------|----------------------------|
| Tip Load (g)<br>6 (long taper)<br>8 (short taper) | Tip Radiopacity (cm)<br>4 | Tip Diameter (in)<br>0.18 | Tip Style<br>Polymer Sleeve | Tip Coating<br>Hydrophilic |
|---|---------------------------|---------------------------|-----------------------------|----------------------------|

### CROSSING GUIDEWIRES

#### Victory™ 14 Guidewire

Cross calcified lesions and tight stenosis in infrapopliteal arteries

|                                |                           |                           |                             |                            |
|--------------------------------|---------------------------|---------------------------|-----------------------------|----------------------------|
| Tip Load (g)<br>12, 18, 25, 30 | Tip Radiopacity (cm)<br>4 | Tip Diameter (in)<br>0.14 | Tip Style<br>Polymer Sleeve | Tip Coating<br>Hydrophilic |
|--------------------------------|---------------------------|---------------------------|-----------------------------|----------------------------|

#### Victory™ 18 Guidewire

Cross calcified lesions and tight stenosis in SFA, infrapopliteal arteries

|                                |                           |                           |                             |                            |
|--------------------------------|---------------------------|---------------------------|-----------------------------|----------------------------|
| Tip Load (g)<br>12, 18, 25, 30 | Tip Radiopacity (cm)<br>4 | Tip Diameter (in)<br>0.18 | Tip Style<br>Polymer Sleeve | Tip Coating<br>Hydrophilic |
|--------------------------------|---------------------------|---------------------------|-----------------------------|----------------------------|

### DELIVERY SUPPORT GUIDEWIRE

#### Savion DLVR™ Guidewire

Maximum device support in infrapopliteal arteries

|                    |                           |                           |                          |   |
|--------------------|---------------------------|---------------------------|--------------------------|---|
| Tip Load (g)<br>.8 | Tip Radiopacity (cm)<br>3 | Tip Diameter (in)<br>0.14 | Tip Style<br>Spring Coil | Tip Coating<br>Hybrid: Distal 3 cm Uncoated/<br>Hydrophilic |
|--------------------|---------------------------|---------------------------|--------------------------|---|